


M600_DE

	REF / ART.NR		ABMESSUNGEN				DRUCKBELASTUNG
		Sh	Ø A	B	D	C	LAST
			mm.				kg.
M-600	M600	75	48	20	M-10	80	0-60
	M601	75	75	28	M-12	100	60-125
	M602	75	100	28	M-12	100	125-200
	M603	75	128	30	M-16	170	200-400
	M604	75	180	36	M-16	170	400-700
	M607	75	180	45	M-16	170	700-1400
	M605	75	226	47	M-20	190	1400-2000
	M606	75	226	60	M-20	190	2000-3000
	M608	75	226	62	M-24	215	3000-5000
Hergestellt aus BUTADIEN-KAUTSCHUK und aus NITRIL-KAUTSCHUK Die gesamte M-600-Serie wird mit verstärkender Zwischenplatte aus Metall gefertigt M600-L y M600-I : Auf Anfrage.							

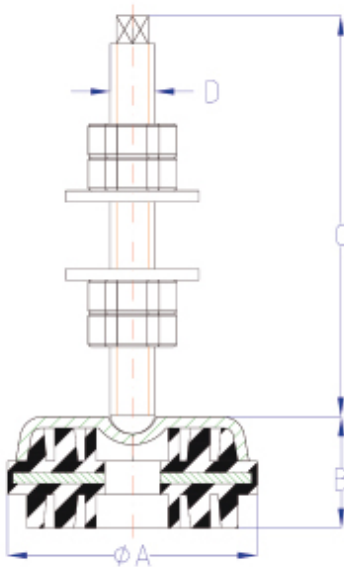

M-600

M-600L

M-600I