


M600R_FR

	REF / ART.NR		DIMENSIONS				COMPRESSION
	Sh	Ø A	B	D	C		CHARGE
	mm.						kg.
M-600 R	M604 R	75	180	56	M-16	160	100-700
	M607 R	75	180	64	M-16	160	700-1400
	M605 R	75	226	68	M-20	185	1400-2000
	M606 R	75	226	78	M-20	185	2000-3000
	fabriqué en nitrile (SYNTHETIQUE) et butyle (IDEALE)						
	REF / ART.NR		DIMENSIONS				COMPRESSION
	Sh	Ø A	Ref./ART.NR2	D	Ref./ART.NR1		CHARGE
	mm.						kg.
M-600 T	T-1	75	12	M-601 T	M8 / M10	M-600 T	0-100
	T-2	75	15	M-602 T	M-12	M-601T	100-200
	T-3	75	15	M-603 T	M-12	M-601T	200-400
	T-4	75	24	M-604 T	M16 / M20	M-602 T	400-700
	T-5	75	24	M-607 T	M-16	M-602 T	700-1200
	T-6	75	24	M-605 T	M-20	M-603 T	1200-1800
	T-7	75	24	M-606 T	M-20	M-603 T	1800-2500
	fabriqué en nitrile (SYNTHETIQUE) et butyle (IDEALE)						

M-600 R

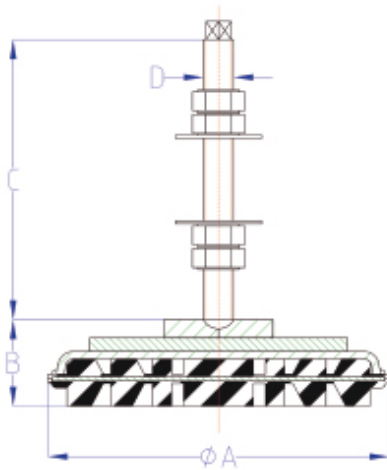

M-600 T

