



M800_EN

	REF / ART.NR		DIMENSIONS				COMPRESSION
		Sh	Ø A	B	D	C	LOAD
			mm.				kg.
M-800	M800	75	45	20	M-8	100	0-100
	M80M10	75	45	20	M-10	70	0-100
	M801	75	75	25	M-12	110	100-200
	M802	75	98	30	M-12	110	200-400
	M803	75	125	30	M-16	155	400-700
	M804	75	175	37	M-16	155	700-1500
	M805	75	222	42	M-20	185	1500-3000
	M806	75	222	61	M-24	185	3000-5000
made in rubber BUTYL (IDEALE) and NITRILE (SYNTHETIC)							
M-800 INOX	M800-X	75	45	20	M-8	95	0-100
	M801-X	75	75	25	M-12	110	100-200
	M802-X	75	98	30	M-12	110	200-400
	M803-X	75	125	30	M-16	155	400-700
	M804-X	75	175	37	M-16	155	700-1500
made in rubber NITRILE (SYNTHETIC) and in stainless steel							
M-700	M700	65	45	20	M-8	100	0-100
	M700M10	65	45	20	M-10	70	0-100
	M701	65	75	24	M-12	110	100-250
	M702	65	98	29	M-12	110	250-400
	M702	65	98	29	M-16	150	250-400
	M703	65	124	30	M-16	155	400-700
	M704	65	175	36	M-16	155	700-1500
	M705	65	222	42	M-20	185	1500-2500
	M706	65	222	61	M-24	185	2500-3800
made in natural rubber (NR)							

M-800

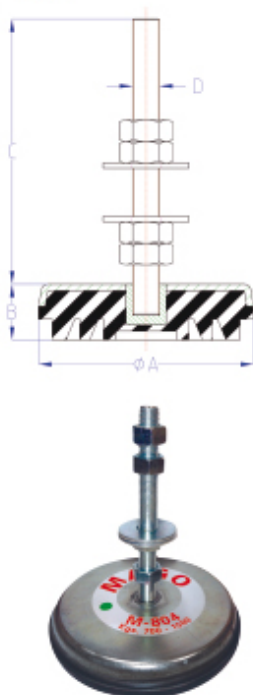

M-800 INOX

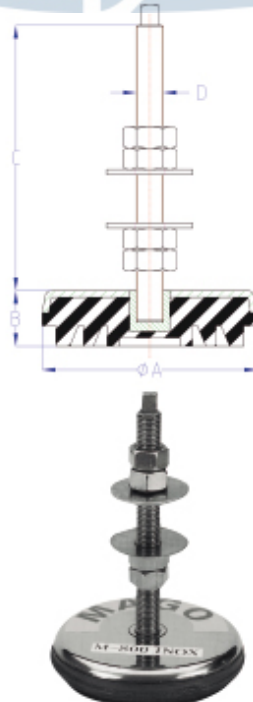

M-700

