



## M800\_FR

|                                                                              | REF / ART.NR |    | DIMENSIONS |    |      |     | COMPRESSION |
|------------------------------------------------------------------------------|--------------|----|------------|----|------|-----|-------------|
|                                                                              |              | Sh | Ø A        | B  | D    | C   | CHARGE      |
|                                                                              |              |    | mm.        |    |      |     | kg.         |
| M-800                                                                        | M800         | 75 | 45         | 20 | M-8  | 100 | 0-100       |
|                                                                              | M80M10       | 75 | 45         | 20 | M-10 | 70  | 0-100       |
|                                                                              | M801         | 75 | 75         | 25 | M-12 | 110 | 100-200     |
|                                                                              | M802         | 75 | 98         | 30 | M-12 | 110 | 200-400     |
|                                                                              | M803         | 75 | 125        | 30 | M-16 | 155 | 400-700     |
|                                                                              | M804         | 75 | 175        | 37 | M-16 | 155 | 700-1500    |
|                                                                              | M805         | 75 | 222        | 42 | M-20 | 185 | 1500-3000   |
|                                                                              | M806         | 75 | 222        | 61 | M-24 | 185 | 3000-5000   |
| fabriqué en caoutchouc BUTYLE (IDEALE) et NITRILE (SYNTHETIQUE)              |              |    |            |    |      |     |             |
| M-800 INOX                                                                   | M800-X       | 75 | 45         | 20 | M-8  | 95  | 0-100       |
|                                                                              | M801-X       | 75 | 75         | 25 | M-12 | 110 | 100-200     |
|                                                                              | M802-X       | 75 | 98         | 30 | M-12 | 110 | 200-400     |
|                                                                              | M803-X       | 75 | 125        | 30 | M-16 | 155 | 400-700     |
|                                                                              | M804-X       | 75 | 175        | 37 | M-16 | 155 | 700-1500    |
| fabriqué en caoutchouc NITRILE (SYNTHETIQUE) et Ressorts en Acier Inoxydable |              |    |            |    |      |     |             |
| M-700                                                                        | M700         | 65 | 45         | 20 | M-8  | 100 | 0-100       |
|                                                                              | M700M10      | 65 | 45         | 20 | M-10 | 70  | 0-100       |
|                                                                              | M701         | 65 | 75         | 24 | M-12 | 110 | 100-250     |
|                                                                              | M702         | 65 | 98         | 29 | M-12 | 110 | 250-400     |
|                                                                              | M702         | 65 | 98         | 29 | M-16 | 150 | 250-400     |
|                                                                              | M703         | 65 | 124        | 30 | M-16 | 155 | 400-700     |
|                                                                              | M704         | 65 | 175        | 36 | M-16 | 155 | 700-1500    |
|                                                                              | M705         | 65 | 222        | 42 | M-20 | 185 | 1500-2500   |
|                                                                              | M706         | 65 | 222        | 61 | M-24 | 185 | 2500-3800   |
| fabriqué en caoutchouc naturel (NR)                                          |              |    |            |    |      |     |             |

M-800

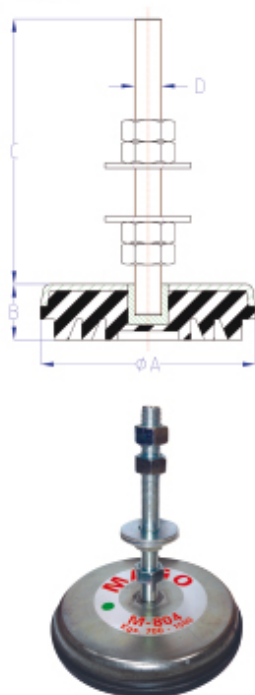

M-800 INOX

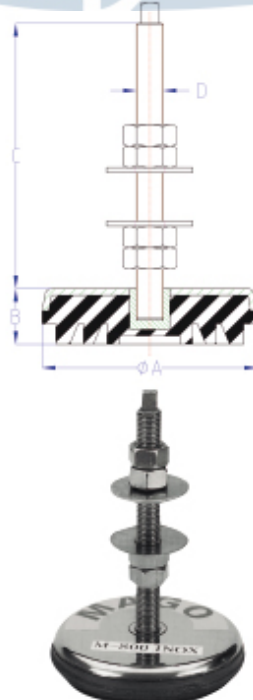

M-700

