


N_FR

	REF / ART.NR	DIMENSIONS								COMPRESSION		RIGIDITE
		ØA	B	C	D	E	F	G	M	CHARGE	FLECHE	
		mm.								kg.	mm.	kg./cm
N	N10	55	59						8	10	11±2,0	9,09
	N15	55	59						8	15	11±2,0	13,64
	N25	55	59						8	25	11±2,0	22,73
	N50	55	59						8	50	11±2,0	45,45
	N75	55	59						8	75	11±2,0	68,18
	N100	55	59						8	100	11±2,0	90,91
	N150	73	91						12	150	13±2,0	115,39
	N250	73	91						12	250	13±2,0	192,31
	N350	73	91						12	350	13±2,0	269,23
	N10B	55	61	90	55	70	10	10	8	10	11±2,0	9,09
	N15B	55	61	90	55	70	10	10	8	15	11±2,0	13,64
	N25B	55	61	90	55	70	10	10	8	25	11±2,0	22,73
	N50B	55	61	90	55	70	10	10	8	50	11±2,0	45,45
	N75B	55	61	90	55	70	10	10	8	75	11±2,0	68,18
	N100B	55	61	90	55	70	10	10	8	100	11±2,0	90,91
	N150B	73	94	110	75	89	11	10	12	150	13±2,0	115,38
	N250B	73	94	110	75	89	11	10	12	250	13±2,0	192,31
	N350B	73	94	110	75	89	11	10	12	350	13±2,0	269,23
	N10BB		63	90	55	70	10	10	8	10	11±2,0	9,09
	N15BB		63	90	55	70	10	10	8	15	11±2,0	13,64
	N25BB		63	90	55	70	10	10	8	25	11±2,0	22,73
	N50BB		63	90	55	70	10	10	8	50	11±2,0	45,45
	N75BB		63	90	55	70	10	10	8	75	11±2,0	68,18
	N100BB		63	90	55	70	10	10	8	100	11±2,0	90,91
	N150BB		95	110	75	89	11	10	12	150	13±2,0	115,38
N250BB		95	110	75	89	11	10	12	250	13±2,0	192,31	
N350BB		95	110	75	89	11	10	12	350	13±2,0	269,23	

N



NB

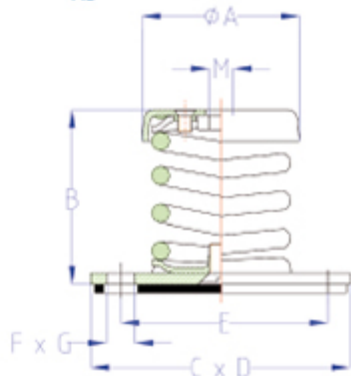

NBB

