


SPRING ISOLATORS**SINGLE SPRING**NLC KTL

	REF / ART.NR	DIMENSIONS								COMPRESSION		STIFFNESS	COMPRESSION		STIFFNESS
		ØA	B	C	D	E	F	G	M	LOAD	DEFLECTION		LOAD	DEFLECTION	
		mm.								kg.	mm.	kg./cm	N	mm.	N/mm
NLCM08-NLCM10 KTL	NLCM08-005 KTL	55	57	.	.	.	.	.	8	5	25±2,0	1.76	36	20±2,0	1.76
	NLCM08-007 KTL	55	57	.	.	.	.	.	8	7	25±2,0	2.74	55	20±2,0	2.74
	NLCM08-012 KTL	55	59	.	.	.	.	.	8	12	25±2,0	4.51	90	20±2,0	4.51
	NLCM08-018 KTL	55	59	.	.	.	.	.	8	18	25±2,0	7.06	150	21±2,0	7.06
	NLCM08-029 KTL	55	59	.	.	.	.	.	8	29	25±2,0	11.37	230	20±2,0	11.37
	NLCM08-044 KTL	55	59	.	.	.	.	.	8	44	25±2,0	17.25	350	20±2,0	17.25
	NLCM08-066 KTL	55	59	.	.	.	.	.	8	66	25±2,0	25.87	550	21±2,0	25.87
	NLCM08-112 KTL	55	59	.	.	.	.	.	8	112	25±2,0	43.9	880	20±2,0	43.9
	NLCM10-020 KTL	73	95						10	20	30±3,0	7.16	265	37±4,0	7.16
	NLCM10-035 KTL	73	95						10	35	30±3,0	12.26	380	31±3,0	12.26
	NLCM10-060 KTL	73	95						10	60	30±3,0	21.61	670	31±3,0	21.61
	NLCM10-095 KTL	73	95						10	95	30±3,0	33.33	1200	36±4,0	33.33
	NLCM10-145 KTL	73	95						10	145	30±3,0	48.57	1700	35±4,0	48.57
	NLCM10-230 KTL	73	95						10	230	30±3,0	77.14	2700	35±4,0	77.14
	NLCM10-370 KTL	73	95						10	370	30±3,0	123.33	3800	30±3,0	123.33
	NLCM10-475 KTL	73	95						10	475	25±2,0	179.31	5200	29±3,0	179.31
	NLCM10-595 KTL	73	95						10	595	25±2,0	238	6400	27±3,0	238

NLC KTL M8

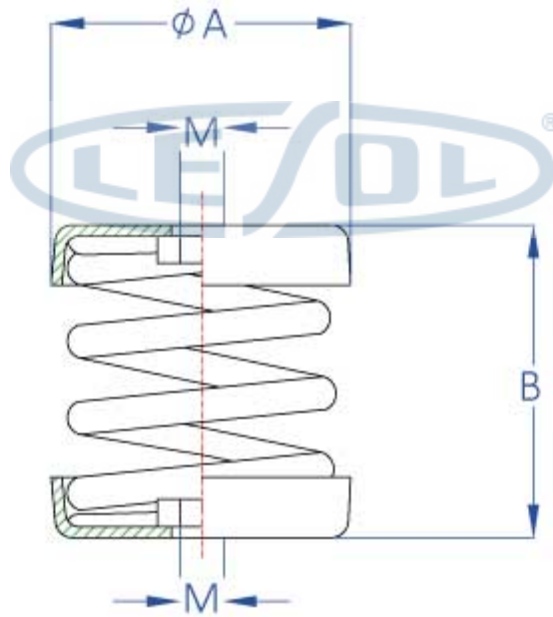

NLC KTL M10

